

Rema Rotary Impact Mill


Models:

Range of sizes designed for throughputs from 5kgs to 2 tonnes per hour.

Applications:

Generally used for less abrasive applications and capable of energy efficient operation, the Rema Rotary Impact Mill is a simple, versatile high-speed impact grinder suitable for materials up to 3 Mohs hardness.

The mill can be equipped with a variety of internal stator and rotor configurations, enabling the unit to meet a wide range of differing applications including pre-grinding, medium and fine grinding, de-agglomeration and dispersion.

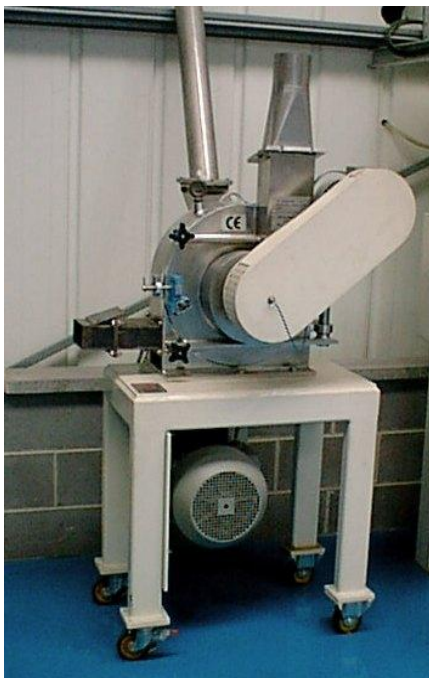

Features and benefits:

- Suitable for milling finished product of 300 microns and below
- Energy efficient operation
- Interchangeable grinding elements and sieve-rings to suit a wide range of applications
- Symmetrical and reversible rotor design to maximise life
- Individually replaceable tool-steel grinding blades
- Rapid and simple access for ease of cleaning and maintenance
- Stator assembly easily removed for clean-down and maintenance
- Mild steel or stainless steel construction
- Optional ceramic lining for wear resistance

British Rema Process Equipment Ltd

Unit 4, Traso Business Park, Callywhite Lane, Dronfield S18 2HX United Kingdom
tel: + 44 (0)1246 296520 **fax:** + 44 (0)1246 292400
email: sales@britishrema.com **web:** www.britishrema.com

Sales Director: David Bugler

Technical Sales Manager: Peter Broughton

Registered address: Masters House, 107 Hammersmith Road, London W14 0QH


Company Registration No: 5556424

General technical data:

Model No.		M20	M35	M50	M75	M100
Motor	Kw	7.5 - 11	15 - 22	30 - 45	45 - 75	90 - 150
Nominal air flow	(M ³ /hour)	1020	2040	3060	5100	10200
Approximate Capacity Scale Factor		1.0	2.5	5.0	10.0	20.0
Approximate Dimensions (mm)	A	533	660	914	1220	1575
	B	276	305	483	584	686
	C	406	559	730	1092	1475
	D	559	635	838	1220	1730
	E	216	280	435	605	875
	F	254	305	380	457	508
	G	101	127	152	203	305
	H	190	280	380	545	790
	J	750	950	1350	1900	2400

NOTE:

All data provided is for guidance only and may be varied at any time by the Company.

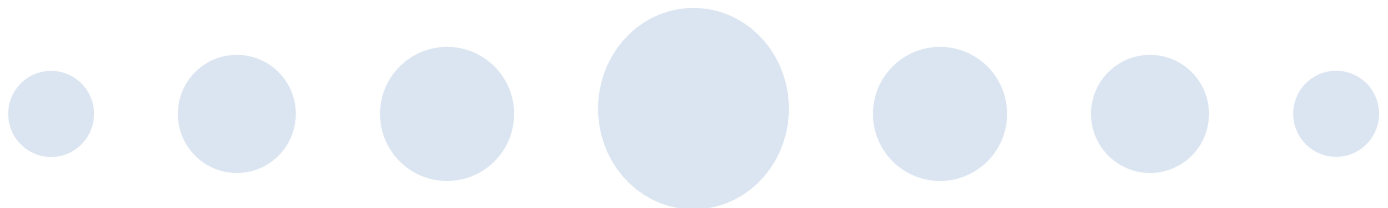

British Rema Process Equipment Ltd

Unit 4, Traso Business Park, Callywhite Lane, Dronfield S18 2HX United Kingdom

tel: + 44 (0)1246 296520

email: sales@britishrema.com

fax: + 44 (0)1246 292400

web: www.britishrema.com

Sales Director: David Bugler

Technical Sales Manager: Peter Broughton

Contract Processing Manager: Simon Abbott

Registered address: Masters House, 107 Hammersmith Road, London W14 0QH

Company Registration No: 5556424